




BEARING CORP.OF AMERICA

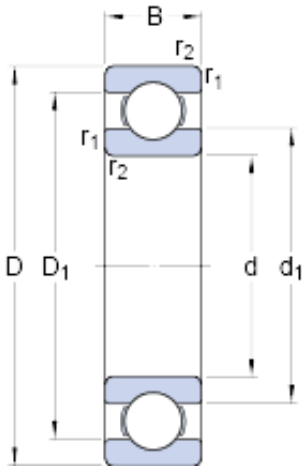

800 mm x 980 mm x 82 mm skf 618/800 MA
Deep groove ball bearings

Bearing No. 618/800 MA

618/800 MA Bearing 2D drawings and 3D CAD models

Size	980x800x82 mm
Bore Diameter	980 mm
Outer Diameter	800 mm
Width	82 mm
d	800 mm
D	980 mm
B	82 mm
d ₁	857.5 mm
D ₁	921.78 mm
r _{1,2} - min.	5 mm
d _a - min.	818 mm
D _a - max.	962 mm
r _a - max.	4 mm
Basic dynamic load rating - C	559 kN
Basic static load rating - C ₀	1370 kN
Fatigue load limit - P _u	19.3 kN
Reference speed	1000 r/min
Limiting speed	850 r/min
Calculation factor - k _r	0.015
Calculation factor - f ₀	17
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



BEARING CORP.OF AMERICA

Weight / Kilogram	172.86
EAN	7316577127037
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Brass
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	800MM Bore; 980MM Outside Diameter; 82MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Brass Cage
Other Features	Deep Groove Centered Outer Ring
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	618/800 MA
Weight / LBS	384.29
Outer Race Width	3.228 Inch 82 Millimeter
Outside Diameter	38.583 Inch 980 Millimeter
Inner Race Width	0 Inch 0 Millimeter



BEARING CORP.OF AMERICA

Bore	31.496 Inch 800 Millimeter
bore diameter:	800 mm
static load capacity:	1370 kN
outside diameter:	980 mm
precision rating:	Not Rated
overall width:	82 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Brass
closure type:	Open
outer ring width:	82 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	4 mm
snap ring included:	Without Snap Ring
maximum rpm:	850 RPM
internal clearance:	C0
series:	61
dynamic load capacity:	559 kN
d_1	857.5 mm
D_1	921.78 mm
$r_{1,2}$ min.	5 mm
d_a min.	818 mm
D_a max.	962 mm
r_a max.	4 mm
Basic dynamic load rating C	559 kN
Basic static load rating C_0	1370 kN
Fatigue load limit P_u	19.3 kN
Calculation factor k_r	0.015
Calculation factor f_0	17
Mass bearing	130 kg